
APDatec 248 SOLIDFLExX PU

Very heavy weight spiral hose made of PVC with highly abrasion resistant PU inner layer

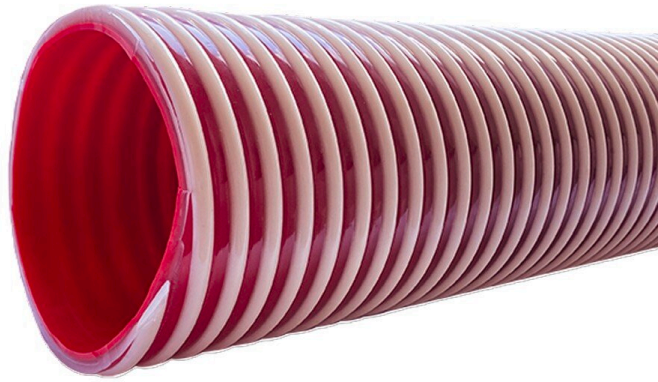

Applications roof graveling, conveying of rubble, gravel conveying, sandblasting, conveying of abrasive media

Structure PVC, red, opaque, plastic spiral / rigid PVC

Temperature -20°C up to 60°C

Properties excellent abrasion resistance, high vacuum resistance, crush-resistant, very smooth inside, corrugated outside, with highly abrasion-resistant polyurethane inner layer, smooth, to ensure very low pressure losses, good mechanical strength





made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
76	91,20	7,60	470	4,50	13,50	0,98	2,00000	100,00	50	2480760500
102	116,00	9,00	600	4,00	12,00	0,93	3,40000	102,00	30	2481020300
127	147,00	10,00	826	3,00	10,00	0,88	4,30000	129,00	30	2481270300
152	170,40	10,70	1	3,00	9,00	0,93	6,70000	134,00	20	2481520200

Ocono APD Schlauchtechnik GmbH | Technologiering 12 | 41751 Viersen | Germany | T +49 2162 361950 | apd@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 19.11.2026