# APDatec 820 RedX Multi

Professional-grade multi-layer PVC pressure hose featuring SMT Steady Mesh Technology

| | |
|---|---|
| **Applications** | waste water, irrigation, agriculture |
| **Structure** | soft PVC, orange, opaque, NTS knitting |
| **Temperature** | -25°C up to 60°C |
| **Properties** | good flexibility, crush-resistant, can be driven over, high pressure resistance, weather proof, hydrolysis & microbe resistant, phthalate-free |









made in Germany

| Inner Diameter (mm) | Outer Diameter (mm) | Wall Thickness (mm) | Bending Radius (mm) | Max. Operating Pressure (bar) | Burst Pressure (bar) | Weight (kg/m) | Total Weight per Piece (kg) | Length (m) | Article Number |
|---|---|---|---|---|---|---|---|---|---|
| 12,5 | 17,50 | 2,50 | 55 | 10,00 | 30,00 | 0,15800 | 6,32 | 40 | 82001340 |
| 18,6 | 24,40 | 2,70 | 100 | 8,00 | 24,00 | 0,26000 | 10,40 | 40 | 82001940 |
| 25 | 33,00 | 4,00 | 140 | 6,00 | 18,00 | 0,40000 | 16,00 | 40 | 82002540 |

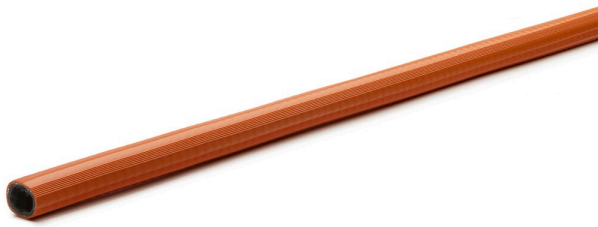

Ocono APD Schlauchtechnik GmbH | Technologiering 12 | 41751 Viersen | Germany | T +49 2162 361950 | apd@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 19.11.2026