


FLEXADUX® HT PU 1.4

Polyurethane ducting for high temperature applications

- Applications** granulate conveying, conveying of abrasive media, high temperature applications, dosing, conveying technology
- Structure** TPU / Polyester-Polyurethane, translucent, steel wire / spring steel wire / not coated / copper plated
- Temperature** -40°C up to 145°C, short term up to 165°C
- Properties** medium weight, good flexibility, very good low-temperature flexibility, very good temperature resistance, very good abrasion resistance

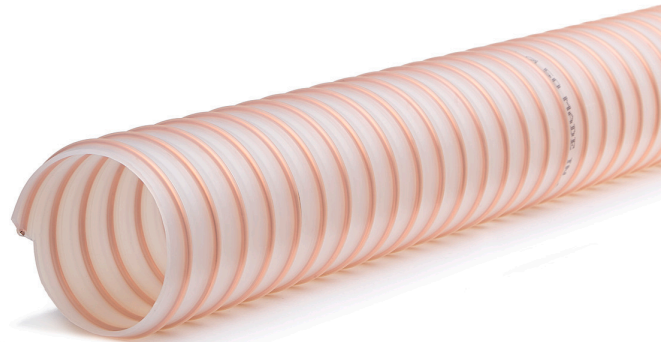

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
25	33,00	1,40	25	3,75	0,90	2,14	10	07604025-1000-000-00
32	41,00	1,40	32	3,56	0,86	3,99	10	07604032-1000-000-00
32	41,00	1,40	32	3,56	0,86	5,98	15	07604032-1500-000-00
38	47,00	1,40	38	2,88	0,70	4,67	10	07604038-1000-000-00
38	47,00	1,40	38	2,88	0,70	7,01	15	07604038-1500-000-00
40	49,00	1,40	40	2,88	0,70	4,90	10	07604040-1000-000-00
40	49,00	1,40	40	2,88	0,70	7,35	15	07604040-1500-000-00
50	59,00	1,40	50	2,38	0,60	6,44	10	07604050-1000-000-00
50	59,00	1,40	50	2,38	0,60	9,65	15	07604050-1500-000-00
60	69,00	1,40	60	2,25	0,55	7,65	10	07604060-1000-000-00
60	69,00	1,40	60	2,25	0,55	11,48	15	07604060-1500-000-00
65	74,00	1,40	65	2,15	0,55	8,26	10	07604065-1000-000-00
65	74,00	1,40	65	2,15	0,55	12,39	15	07604065-1500-000-00
70	79,00	1,40	70	2,00	0,55	8,87	10	07604070-1000-000-00
75	84,00	1,40	75	1,75	0,50	9,47	10	07604075-1000-000-00
75	84,00	1,40	75	1,75	0,50	14,21	15	07604075-1500-000-00
80	89,00	1,40	80	1,50	0,45	10,08	10	07604080-1000-000-00
90	99,00	1,40	90	1,35	0,40	11,29	10	07604090-1000-000-00
90	99,00	1,40	90	1,35	0,40	16,94	15	07604090-1500-000-00
100	110,00	1,40	100	1,21	0,40	14,86	10	07604100-1000-000-00
100	110,00	1,40	100	1,21	0,40	22,29	15	07604100-1500-000-00
120	130,00	1,40	120	0,99	0,30	16,11	10	07604120-1000-000-00

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
125	135,00	1,40	125	0,88	0,25	16,75	10	07604125-1000-000-00
150	160,00	1,40	150	0,77	0,20	24,28	10	07604150-1000-000-00