
APDatec 15020 Armoured Hose

Armored hose with stainless steel braiding for water supply

Applications	sanitary
Structure	aluminum
Temperature	-5°C up to 110°C
Properties	good temperature resistance, crush-resistant, good tensile strength, ultimate elongation, high pressure resistance

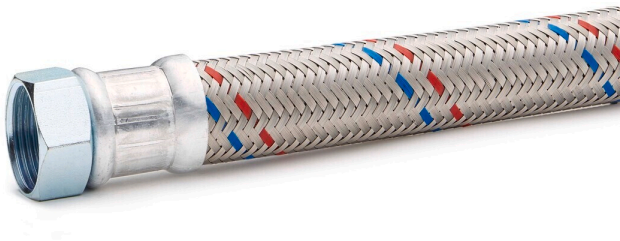

liquids

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
25	33,00	4,00	20,00	60,00	0,55000	0,55	1	15020

Ocono APD Schlauchtechnik GmbH | Technologiering 12 | 41751 Viersen | Germany | T +49 2162 361950 | apd@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 19.11.2026