
Twin Welding Hose 255

Multi-layer rubber hose with Polyester fabric, vulcanized as a twin line

Applications	welding technology, construction machines
Structure	EPDM, blue / blue/red, opaque, cross braid
Temperature	-20°C up to 90°C
Properties	good low-temperature flexibility, high pressure resistance, good chemical resistance, good oil & petrol resistance





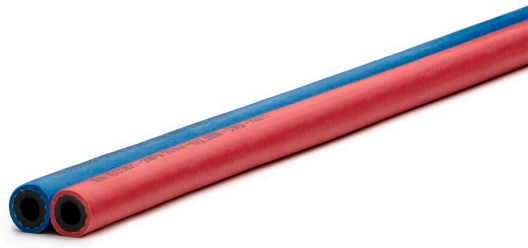

made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
6	13,00	3,50	30	20,00	60,00	0,32000	12,80	40	255006640
9	13,16	3,50	45	20,00	60,00	0,45000	22,50	50	255006950

Ocono APD Schlauchtechnik GmbH | Technologiering 12 | 41751 Viersen | Germany | T +49 2162 361950 | apd@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 19.11.2026