APDatec 910 opaque blue


Single layer Polyamide tube of PA 11/12

Applications pneumatics, automation technology & robotics, welding technology, vehicle construction, compressors

Structure PA, blue, opaque

Temperature -40°C up to 90°C

Properties good temperature resistance, high pressure resistance, smooth inside, smooth outside

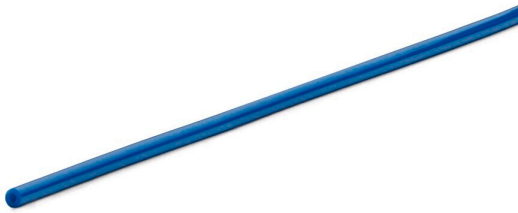





Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
2	4,00	1,00	20	40,00	0,01000	1,00	100	9100041000
2	4,00	1,00	20	40,00	0,01000	0,50	50	910B0041050
3	5,00	1,00	25	35,00	0,01350	1,35	100	9100051000
4	6,00	1,00	30	25,00	0,01600	1,60	100	9100061000
4	6,00	1,00	30	25,00	0,01600	0,80	50	910B0061050
6	8,00	1,00	40	20,00	0,02260	2,26	100	9100081000
6	8,00	1,00	40	20,00	0,02260	1,13	50	910B0081050
8	10,00	1,00	60	15,00	0,03000	3,00	100	9100101000
9	12,00	1,50	75	17,00	0,05300	2,65	50	910B0121550
10	12,00	1,00	60	13,00	0,03600	1,80	50	9100121050
11	14,00	1,50	85	14,00	0,06200	6,20	100	9100141500
27	4,00	0,65	20	30,00	0,01000	0,50	50	910B0040650

Ocono APD Schlauchtechnik GmbH | Technologiering 12 | 41751 Viersen | Germany | T +49 2162 361950 | apd@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 19.11.2026