One Flat Agro black

Highly abrasion-resistant flat hose made of NBR rubber

Applications agriculture, liquid manure spreading, cable protection, construction drying

Structure NBR soft PVC, black, opaque

Temperature -20°C up to 80°C

Properties good abrasion resistance, good tensile strength crush-resistant can be driven over, high pressure resistance, very smooth inside, good oil & petrol resistance

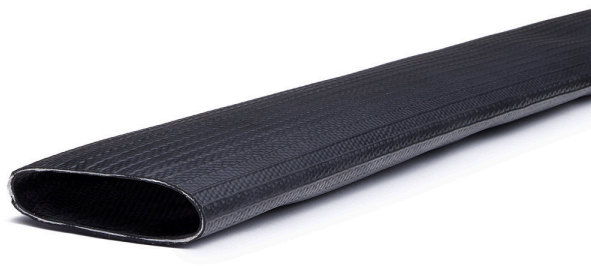





Inner Diameter (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
20	25,00	75,00	0,16000	16,00	100	760201000
32	20,00	60,00	0,23000	23,00	100	760321000
52	16,00	50,00	0,40000	40,00	100	760521000
75	16,00	50,00	0,68000	68,00	100	760751000
102	16,00	50,00	1,00000	100,00	100	761021000
110	16,00	50,00	1,10000	110,00	100	761101000
127	15,00	45,00	1,40000	140,00	100	761271000
152	14,00	42,00	1,70000	170,00	100	761521000

Ocono APD Schlauchtechnik GmbH | Technologiering 12 | 41751 Viersen | Germany | T +49 2162 361950 | apd@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 19.11.2026