VIDAFLEX EXTRA


Very flexible spiral hose made of a special soft PVC

Applications waste management, waste water, waste disposal vehicles, liquid manure spreading, suction vehicles & dredgers

Structure soft PVC, blue / signal blue (similar RAL 5005), opaque, plastic spiral / rigid PVC

Temperature -40°C up to 50°C

Properties very good flexibility, very good low-temperature flexibility, crush-resistant, very high pressure resistance, very high vacuum resistance, corrugated outside, very smooth inside

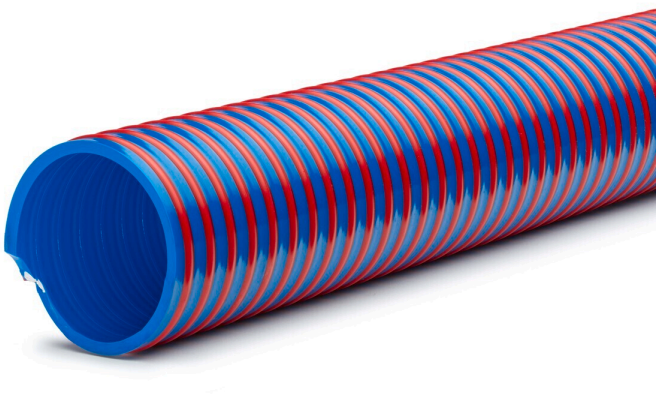





made in Germany

Inner Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Length (m)	Article Number
40	4,50	150	5,00	0,88	0,80000	50	1480400500
51	4,70	170	5,00	0,88	1,00000	30	1480510300
51	4,70	170	5,00	0,88	1,00000	50	1480510500
60	5,30	190	4,00	0,88	1,38000	50	1480600500
70	6,20	240	4,00	0,88	1,50000	30	1480700300
80	6,20	250	3,00	0,88	2,10000	30	1480800300
102	7,20	320	3,00	0,88	2,70000	30	1481020300

Ocono APD Schlauchtechnik GmbH | Technologiering 12 | 41751 Viersen | Germany | T +49 2162 361950 | apd@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 23.11.2026