OneFlat SL

Light weight flat hose with a PVC inner layer and woven polyester yarn inlay

Applications waste water, construction drying, irrigation, agriculture, construction machines

Structure PVC, blue, opaque

Temperature -20°C up to 65°C

Properties light weight, crush-resistant can be driven over, high pressure resistance, smooth inside smooth outside

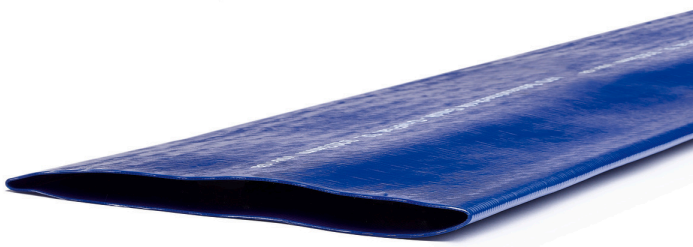





Inner Diameter (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
152	3,00	9,00	0,90000	45,00	50	701520500
203	3,00	8,00	1,60000	80,00	50	702030500

Ocono APD Schlauchtechnik GmbH | Technologiering 12 | 41751 Viersen | Germany | T +49 2162 361950 | apd@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 24.11.2026