VC2 SeedX PU

A lightweight, highly flexible and UV-resistant polyether-polyurethane hose, reinforced with an impact-resistant rigid PVC spiral

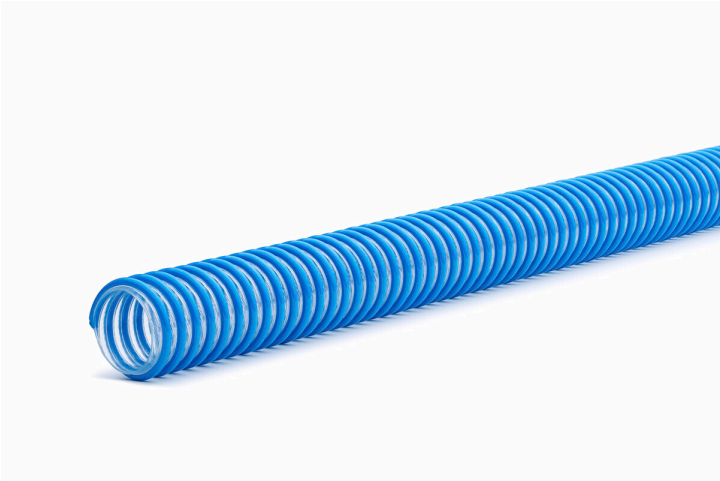

Applications seed conveying, grain conveying, fertilizer spreading, agriculture, waste water

Structure Polyether-Polyurethane, uncolored, transparent, plastic spiral / rigid PVC

Temperature -30°C up to 90°C

Properties very good flexibility, , good abrasion resistance, corrugated outside very smooth inside, good ozone- & UV-resistance hydrolysis & microbe resistant rot proof weather proof





made in Germany

Inner Diameter (mm)	Wall Thickness (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Article Number
32	0,60	2,50	0,65	0,27000	3-6800-032-01
35	0,60	2,50	0,65	0,27800	3-6800-035-01
40	0,60	2,50	0,60	0,31800	3-6800-040-01
45	0,60	2,50	0,60	0,37100	3-6800-045-01

Ocono VACUFLEX GmbH | Hessenring 8-12 | 64546 Mörfelden-Walldorf | Germany | T +49 6105 93390 | vacuflex@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 24.11.2026