APDatec 920 opaque blue


Single layer Polyethylene tube

Applications pneumatics, vehicle construction, compressors, automation technology & robotics, compressed air

Structure PE, blue, opaque

Temperature -30°C up to 70°C

Properties good temperature resistance, , smooth inside, smooth outside

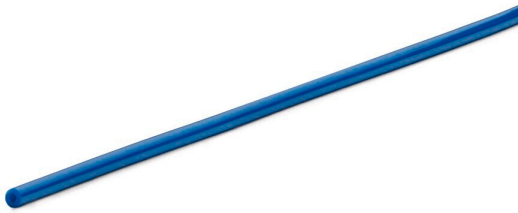

very smooth inside

air

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
2	4,00	1,00	24	15,00	45,00	0,00900	0,90	100	9200041000
2	4,00	1,00	20	15,00	45,00	0,00900	0,45	50	920B0041050
4	6,00	1,00	36	8,00	32,00	0,01500	0,75	50	9200061050
5	8,00	1,50	60	8,00	24,00	0,02900	2,90	100	920B0081500
6	8,00	1,00	48	8,00	24,00	0,02000	2,00	100	9200081000
6	8,00	1,00	48	8,00	24,00	0,02000	1,00	50	9200081050
6	10,00	2,00	40	12,00		0,02900	2,90	100	9200102000
7	10,00	1,50	60	8,00	24,00	0,03700	3,70	100	9200101500
8	10,00	1,00	60	8,00	24,00	0,03700	3,70	100	9200101000
9	12,00	1,50	72	6,00	18,00	0,48000	24,00	50	920B0121550

Ocono APD Schlauchtechnik GmbH | Technologiering 12 | 41751 Viersen | Germany | T +49 2162 361950 | apd@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.

Date: 19.11.2026