APDatec 925 opaque blue


Single layer Polyamide tube of PA 11/12

Applications automation technology & robotics, pneumatics, vehicle construction, compressors, compressed air

Structure Polyether-Polyurethane, blue, opaque

Temperature -35°C up to 80°C

Properties light weight, very good flexibility, good temperature resistance, very high pressure resistance, good ozone- & UV-resistance

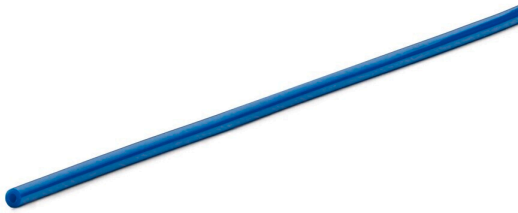





Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
2	4,00	1,00	10	9,00	0,01200	1,20	100	9250041000
2	4,00	1,00	10	9,00	0,01100	0,55	50	9250041050
4	6,00	1,00	18	9,00	0,01900	0,95	50	9250061050
6	8,00	1,00	22	9,00	0,02900	1,45	50	9250081050
7	10,00	1,50	25	9,00	0,02600	2,60	100	9250101500
8	10,00	1,00	25	9,00	0,02600	1,30	50	9250101050
8	12,00	2,00	40	9,00	0,07600	3,80	50	9250122050

Ocono APD Schlauchtechnik GmbH | Technologiering 12 | 41751 Viersen | Germany | T +49 2162 361950 | apd@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 19.11.2026