


GENESIS® ToiVac N

Flexible and very heavy weight ducting made of PE

- Applications** mobile toilets, sewage suction, waste disposal vehicles, waste water, sewage treatment plants
- Structure** PE, yellow / saffron yellow (similar RAL 1017), opaque, plastic spiral / PE
- Temperature** -40°C up to 60°C
- Properties** can be driven over, crush-resistant, good tensile strength, very high vacuum resistance, very good chemical resistance, weather proof, good ozone- & UV-resistance, hydrolysis & microbe resistant, rot proof
- Optional**
 - with tightly welded connection cuffs
 - cuffs also available individually

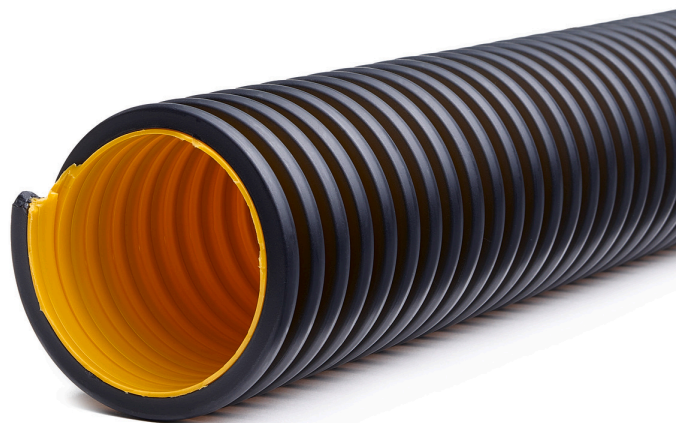

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
51	71,00	1,40	85	0,00	0,95	8,57	10	43511051-1000-000-00
51	71,00	1,40	85	0,00	0,95	12,85	15	43511051-1500-000-00
63	83,00	1,40	105	0,00	0,95	12,24	10	43511063-1000-000-00
63	83,00	1,40	105	0,00	0,95	18,36	15	43511063-1500-000-00
76	96,00	1,40	125	0,00	0,95	14,53	10	43511076-1000-000-00
76	96,00	1,40	125	0,00	0,95	21,79	15	43511076-1500-000-00
80	100,00	1,40	140	0,00	0,80	15,20	10	43511080-1000-000-00
80	100,00	1,40	140	0,00	0,80	22,79	15	43511080-1500-000-00
102	122,00	1,40	165	0,00	0,85	19,10	10	43511102-1000-000-00
102	122,00	1,40	165	0,00	0,85	28,65	15	43511102-1500-000-00