


OneFlat Premium 188

Light weight flat hose with an EPDM inner layer and woven polyester yarn inlay, fully assembled with Storz couplings

- Applications** waste water, construction machines, pump technology, cable protection, construction drying
- Structure** EPDM, white, opaque
- Temperature** -20°C up to 65°C
- Properties** light weight, crush-resistant, can be driven over, very high pressure resistance, smooth inside, hydrolysis & microbe resistant

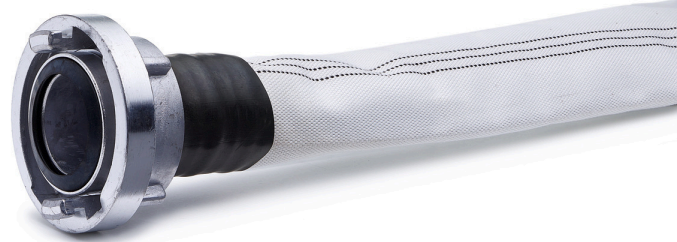

| Inner Diameter (mm) | Max. Operating Pressure (bar) | Burst Pressure (bar) | Total Weight per Piece (kg) | Length (m) | Article Number |
|---------------------|-------------------------------|----------------------|-----------------------------|------------|----------------|
| 51 | 14,00 | 40,00 | 5,32 | 20 | 1880520200 |
| 76 | 14,00 | 40,00 | 8,36 | 20 | 1880760200 |
| 102 | 14,00 | 40,00 | 13,26 | 20 | 1881020200 |