


## OCEANFLEXX PU 2.0

<b>Applications</b>	conveying of abrasive media, feed conveying, conveying technology, fish farming, pump technology
<b>Structure</b>	TPU / Polyether-Polyurethane, transparent, steel wire / spring steel wire / not coated / copper plated
<b>Temperature</b>	-40°C up to 100°C, short term up to 125°C
<b>Properties</b>	excellent abrasion resistance, very high pressure resistance very high vacuum resistance, very smooth inside, good ozone- & UV-resistance hydrolysis & microbe resistant, good tensile strength crush-resistant
<b>Norms</b>	certified according NS 9416:2013

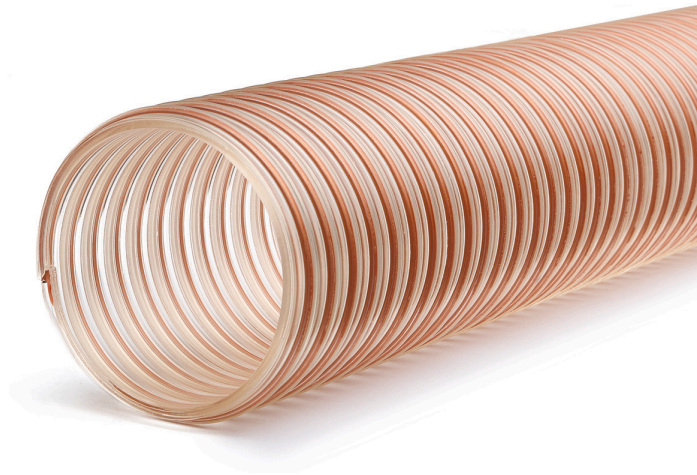

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
305	320,00	2,00	750	0,86	0,25	90,37	15	09520305-1500-000-00
305	320,00	2,00	750	0,86	0,25	60,25	10	09520305-1000-000-00
356	371,00	2,00	875	0,77	0,15	70,07	10	09520356-1000-000-00
356	371,00	2,00	875	0,77	0,15	105,11	15	09520356-1500-000-00
406	421,00	2,00	1.015	0,63	0,10	79,71	10	09520406-1000-000-00
406	421,00	2,00	1.015	0,63	0,10	119,56	15	09520406-1500-000-00
508	523,00	2,00	1.270	0,40	0,05	99,38	10	09520508-1000-000-00
508	523,00	2,00	1.270	0,40	0,05	149,04	15	09520508-1500-000-00