


## APDatec 928 blaugedeckt

- Applications** compressed air, shipbuilding, sprayers, automotive engineering, battery- & accumulator technology
- Structure** TPU / Polyester-Polyurethane, blue, opaque, cross braid
- Temperature** -40°C up to 90°C

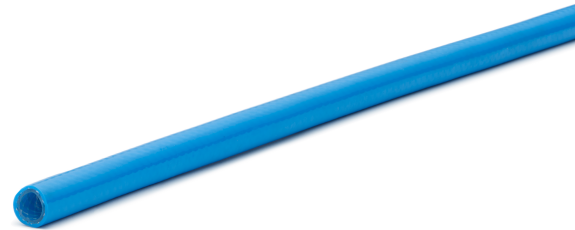

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
9	13,00	2,50	50	20,00	60,00	0,10700	5,35	50	92800950
13	18,00	2,50	65	15,00	45,00	0,16500	8,25	50	92801350
16	21,00	2,50	70	12,00	36,00	0,21000	10,50	50	92801650
19	24,00	2,50	90	10,00	30,00	0,24000	12,00	50	92801950
19	24,00	2,50	90	10,00	30,00	0,24000	6,00	25	92801925
25	29,00	2,50	120	7,00	21,00	0,28000	7,00	25	92802525